

Phase King Cable


Cable Type P190E

DC - 26.50 GHz


Specifications		
Cable Code	Standard	19E
	Armored	19Ex
Frequency Range	DC - 26.50 GHz	
Outer Diameter [mm]	5.31	
Impedance [Ohms] (@ sea level and +25°C)	50 ± 2	
Velocity of Propagation [% , ± 2%]	82.40	
Capacitance [pF/m]	79.70	
Dielectric Strength (60 Hz) [KV rms]	-	
Max. Operating Voltage (60 Hz, @ sea level) [KV rms]	-	
Nominal Insertion Loss vs. Frequency [dB/m]	1.00 GHz	0.28
	2.50 GHz	0.44
	10.00 GHz	0.92
	18.00 GHz	1.27
	26.00 GHz	1.56
Nominal CW Power vs. Frequency (@ sea level and +20°C) [Watts]	1.00 GHz	730.00
	2.50 GHz	470.00
	10.00 GHz	220.00
	18.00 GHz	170.00
	26.00 GHz	135.00
RF Leakage @ 9.5 GHz	- dBc	
Operating Temperature Range	-54 to +125	
Center Conductor	Material	Solid silver-plated copper
	Diameter [mm]	1.30
Dielectric	Material	EPTFE
	Diameter [mm]	3.58
	Dielectric Constant	1.5
Outer Conductor Construction	Helically -wrapped silver-plated flat wire, high-coverage silver-plated copper braid, Helically -wrapped silver-plated flat wire, high-coverage silver-plated copper braid	
Outer Jacket	FEP	
Weight [grams/m]	70.00	
Connector Retention Force [N]	175.00	
Minimum Bend Radius, Inside, Static [mm]	26.00	
Minimum Bend Radius, Inside, Dynamic [mm]	52.00	

Characteristics:

Cross Section View:

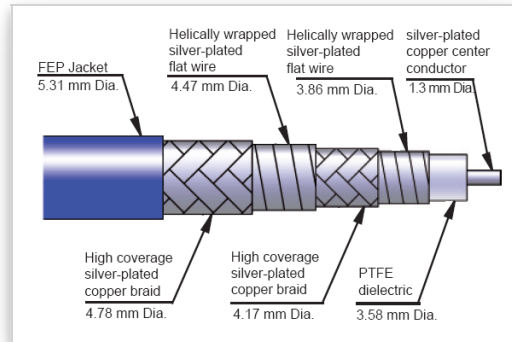

Attenuation & Power Graph:

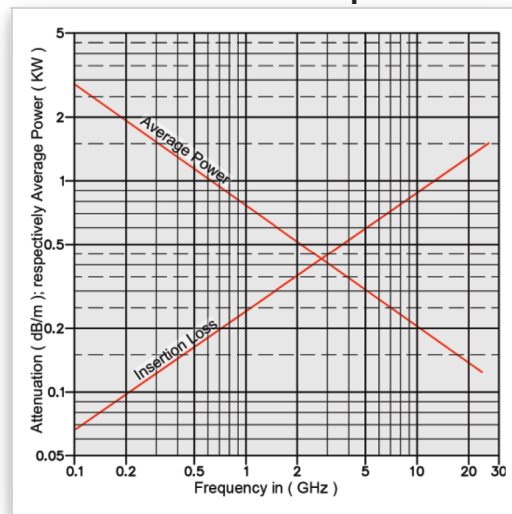

Spectrum Elektrotechnik GmbH | Olschewskibogen 1 | 80935 Munich, Germany

www.spectrum-et.com | sales@spectrum-et.com | +49 (0)89 / 354 804-0 | +49 (0)89 / 354 804-90

Specifications are subject to change without notice.